


AQUA LEAK DETECTION


BUCKET TEST GUIDE



STEP 1:

Fill a leak-free, 5-gallon bucket with water and mark the level on the **inside** of the bucket.

This will be the control of what the evaporation rate actually is.

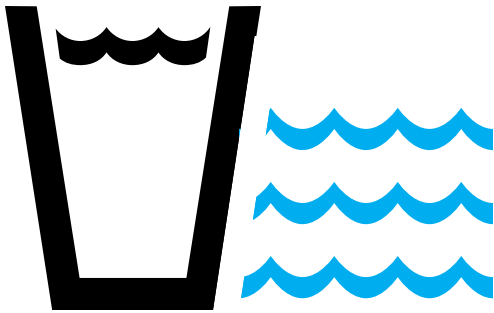


STEP 2:

Set the bucket on the top step in your pool.

This allows the water in the bucket to mimic the temperature of the water in the pool.

*Note: do not heat the pool during testing.

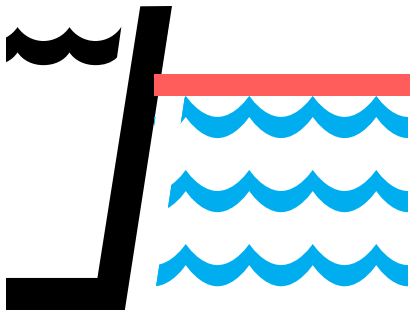

STEP 3:

Observe the level of the pool water and mark the **outside** of the bucket at the height of the pool water level.

At this point, keep an eye on the two levels. The water level in the pool (outside mark) should drop at the same rate as the bucket water (inside mark).

Suspect a leak and still unsure about evaporation?

We are glad to help! Give us a call @ (941) 270-6138